
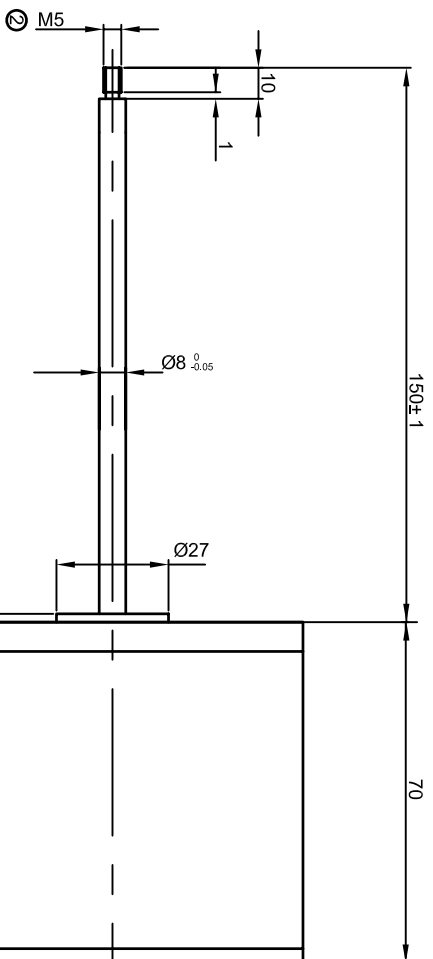
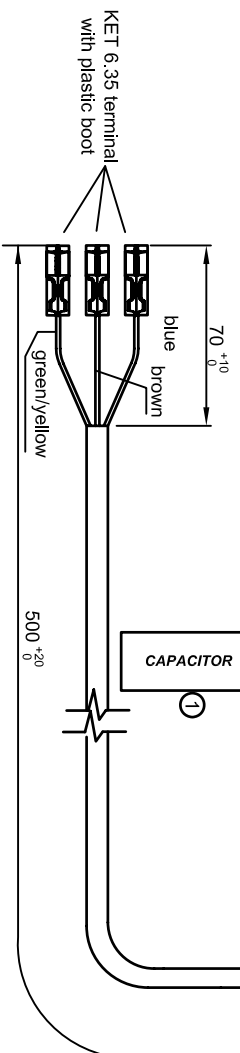
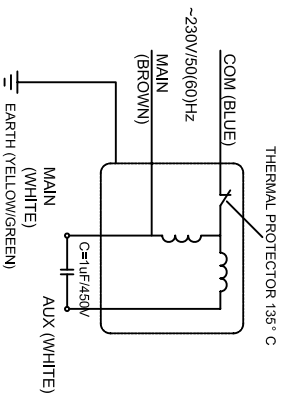


Rotation: Anti-clockwise as viewed from the shaft end

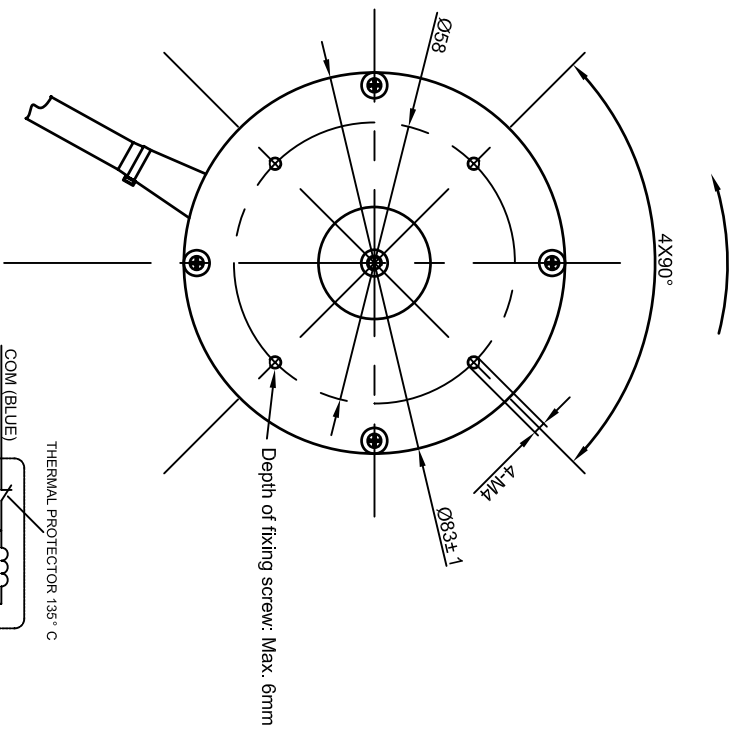

- Requirements:
1. Type: ACO80-AGT-1532
  2. Technical data:

Voltage	230V	Frequency	50/60Hz
Input power	32W	Capacitor	1 µF/500VAC
Speed	2800rpm	High voltage test	1500V, 1S
Insulation Class	B	Protection Class	IP44
Ambient Temp.	40° C	Thermal Protector	135± 5° C

3. Length of lead wire: 450mm
4. Material of shaft: Stainless steel-AISI303(DIN1.4305)
5. Ball bearing: NMB608
6. Weight of motor: 0.8kg

DIMENSIONS ARE IN MM  
 GENERAL TOLERANCE:  
 LINEAR: GB/T 1804-m  
 ANGULAR: GB/T 11335-m  
 GEOMETRICAL: GB/T 1184-K

FINISH

MATERIAL:

DRAWN	NAME	DATE
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
ITG	Liang Xuzhi	2007.02.13

TITLE:

Outline Drawing of Agitator Motor

Wuxi ITG Cleanroom System Engineering Co., Ltd.

DO NOT SCALE DRAWING

REVISION: 02 2007.06.26

PART NO.	DWG NO.	SCALE:
CUSTOMER DRAWING:	AAAM-YG-000	SHEET:

A4

ZONE	REV.	DESCRIPTION	DATE	APPROVED
①	02	Capacitor connection was changed	2007.06.26	
②	02	Propeller fixing screw was changed from M4 to M5	2007.06.26	

REVISIONS

6

5

4

3

2

1